

PPPL	PRINCETON PLASMA PHYSICS LABORATORY ES&H DIRECTIVES		
	ES&HD 5008 SECTION 11, CHAPTER 1 Operations Hazard Criteria		
Approved	Date: 01/29/99	Revision 0	Page 1 of 6

1.0 INTRODUCTION

The purpose of this **Manual Chapter** is to classify operations as to their hazard level, to indicate the **required** control actions to be performed **for** each hazard level, and to specify the approval level required. This directive is responsive, in part, to DOE Order 5481.1B, "Safety Analysis and Review System".

2.0 HAZARD CLASSIFICATIONS

All operations at PPPL shall be classified as either LOW, MODERATE, OR HIGH safety hazards. Hazard classification shall be determined by line management (**i.e., by the responsible Department Head or his/her designee**). In the event of conflict, the classification shall be made by the **ES&H Executive Board (ES&H-EB)**. Final hazard classifications, along with all required approvals and documentation as stated in this **Chapter**, shall be completed before implementation of any new operation.

Nuclear operations shall also be classified in accordance with DOE-STD-1027, "Hazard Characterization and Accident Analysis Techniques for Compliance with DOE Order 5480.23, Nuclear Safety Analysis Reports."

2.1 LOW HAZARD OPERATIONS

A low hazard operation presents minor onsite and negligible offsite impacts to people or the environment. Typical low hazard operations are as follows:

1. Normal shop operations, using hand and power tools.
2. Operation of small **research** devices and experiments.
3. Office work.

2.1.1 LOW HAZARD CONTROL TECHNIQUES

Applicable safety training, on the job training, supervisor pre-job briefings and adequate management supervision are primary techniques of low hazard control.

2.1.2 LOW HAZARD APPROVALS

The immediate supervisor approves low hazard operations and written documentation is not **required**.

2.2 MODERATE HAZARD OPERATIONS

A moderate hazard operation presents considerable potential onsite impacts to people or the environment, but at most only minor offsite impacts. Typical moderate hazard operations **may involve some or all of the following**:

1. Operation of an energy storage capacitor bank.
2. Operations where personnel safety interlocks have been bypassed or rendered inoperative.
3. Confined Space Entry
4. Crane Operation

2.2.1 MODERATE HAZARD CONTROL TECHNIQUES

Pre-job briefing, training, personnel certification, written permits, written approvals, and coordination of activities are the primary control techniques.

Periodic management walk-throughs and safety inspections **should be employed for** moderate hazard **operations**.

A hazard analysis is required. A Safety Assessment Document (SAD) may be directed by **the responsible Department Head or the ES&H-EB**, or **may be prepared at the discretion of the responsible Project Head or Principle Investigator**.

2.2.2 MODERATE HAZARD APPROVALS

Moderate hazard operations require written approval from the **responsible Department Head**.

2.3 HIGH HAZARD OPERATIONS

A high hazard operation presents major potential for serious onsite or offsite impacts to people or the environment. Operations are defined high hazard due to their intrinsic hazards or due to a collection of lower hazards which increase the probability of a serious accident. Typical high hazard operations **or their potential effects** are as follows:

1. **TFTR Operations**
2. PBX-M Operations
3. **NSTX Operations**
4. Any operation where there is a real possibility of **> \$1 Million** property loss or damage, including **costs of cleaning, decontaminating, renovating, replacing, or rehabilitating structures, equipment, or property** [threshold for Type B Investigation per DOE 225.1A].
5. Any operation where there is a real possibility of **100 mrem** effective dose equivalent to **an** offsite individual [ES&HD 5008, Section 10, Table 10.7].
6. Any operation where there is a real possibility of **600 mrem** effective dose equivalent to any occupational worker [ES&HD 5008, Section 10.210]

2.3.1 HIGH HAZARD CONTROL TECHNIQUES

A safety certificate is required (See **ES&HD 5008, Section 11, Chapter 2**). Either a Safety Assessment Document (SAD) or a Safety Analysis Report (SAR), as determined by DOE, shall be prepared, **reviewed and approved by the PPPL Safety Review Committee (SRC)**.

2.3.2 HIGH HAZARD APPROVALS

An operation may be classified as high hazard by **the responsible Department Head or the ES&H-EB**. Once an operation has been classified as a high hazard, a safety certificate **authorizing commencement of operations** shall be issued by the **ES&H-EB** after review and documentation **per ES&HD 5008, Section 11, Chapter 2**. If specified by DOE, DOE approval shall also be required.

3.0 HAZARD ANALYSIS

Appendix 2 **provides some suggested analytical elements** that can be used in performing a hazard analysis. **The ES&H Division can be consulted for additional guidance**.

4.0 DEFINITIONS

4.1 OPERATIONS - At PPPL, operations as defined here are generally synonymous with projects **or experimental devices**. Operations do not include activities that involve hazards that are routinely encountered and accepted in the course of everyday living by the vast majority of the general public (e.g., machine shops which do not handle hazardous materials, cars for personal transportation).

4.2 PRE-JOB BRIEFING (PJB) - This is a briefing conducted by the supervisor with the employee in which the supervisor explains the job that the employee is to perform. It includes **a** description of hazards and potential risks associated with the job and emphasizes safety precautions required and the correct sequence of operations, as well as the description of required protective equipment. Recent changes to relevant equipment and/or procedures are considered.

4.3 RISK - A quantitative or qualitative expression of possible loss which considers both the probability that a hazard will cause harm and the consequences of that event.

4.4 SAFETY ANALYSIS - A documented process (via SAD or SAR) to systematically identify the hazards of a PPPL operation, to describe and analyze the adequacy of the measures taken to eliminate, control or mitigate identified hazards, and to analyze and evaluate potential accidents and their associated risks.

4.5 SAFETY ANALYSIS REPORT (SAR) - A SAR is an extensive documentation process in which potential hazards associated with facility operations are: identified, analyzed to determine and quantify consequences; associated with a specific level of risk; and minimized through the choice of appropriate methods of detection and control. The document content and format **should** follow the requirements of DOE Order 5481.1B, Chapter II, Section 4, **except SARs for nuclear facilities which must follow DOE Order 5480.23**. The SAR shall be **reviewed and approved by the PPPL Safety Review Committee (SRC) per PPPL document O-022**. The SAR may also have to be presented to DOE for review and **approval, particularly if a nuclear facility is involved**.


4.6 SAFETY ASSESSMENT DOCUMENT (SAD) - This document presents the safety assessment of a High Hazard operation (and may be used for other hazard level operations if deemed desirable). The SAD provides descriptions of relevant structures, systems and components, identification of hazards associated with the operation, and design features and administrative controls to mitigate these. The document content and format should follow the requirements of DOE Order 5481.1B, Chapter II, Section 4. The SAR shall be reviewed and approved by the PPPL Safety Review Committee (SRC) per PPPL document O-022.

4.7 SAFETY CERTIFICATION - This is a document that authorizes start-up and/or continuing operation of a high hazard operation, and is issued by the ES&H/EB after review and documentation per ES&HD 5008, Section 11, Chapter 2.

5.0 REFERENCES

PPPL Document O-022	Safety Review Committee Charter
DOE Order 225.1A	Accident Investigations
DOE Order 5480.23	Nuclear Safety Analysis Reports
DOE Order 5481.1B	Safety Analysis and Review System
DOE-STD-1027	Hazard Characterization and Accident Analysis Techniques for Compliance with DOE Order 5480.23, Nuclear Safety Analysis Reports

APPENDIX-1

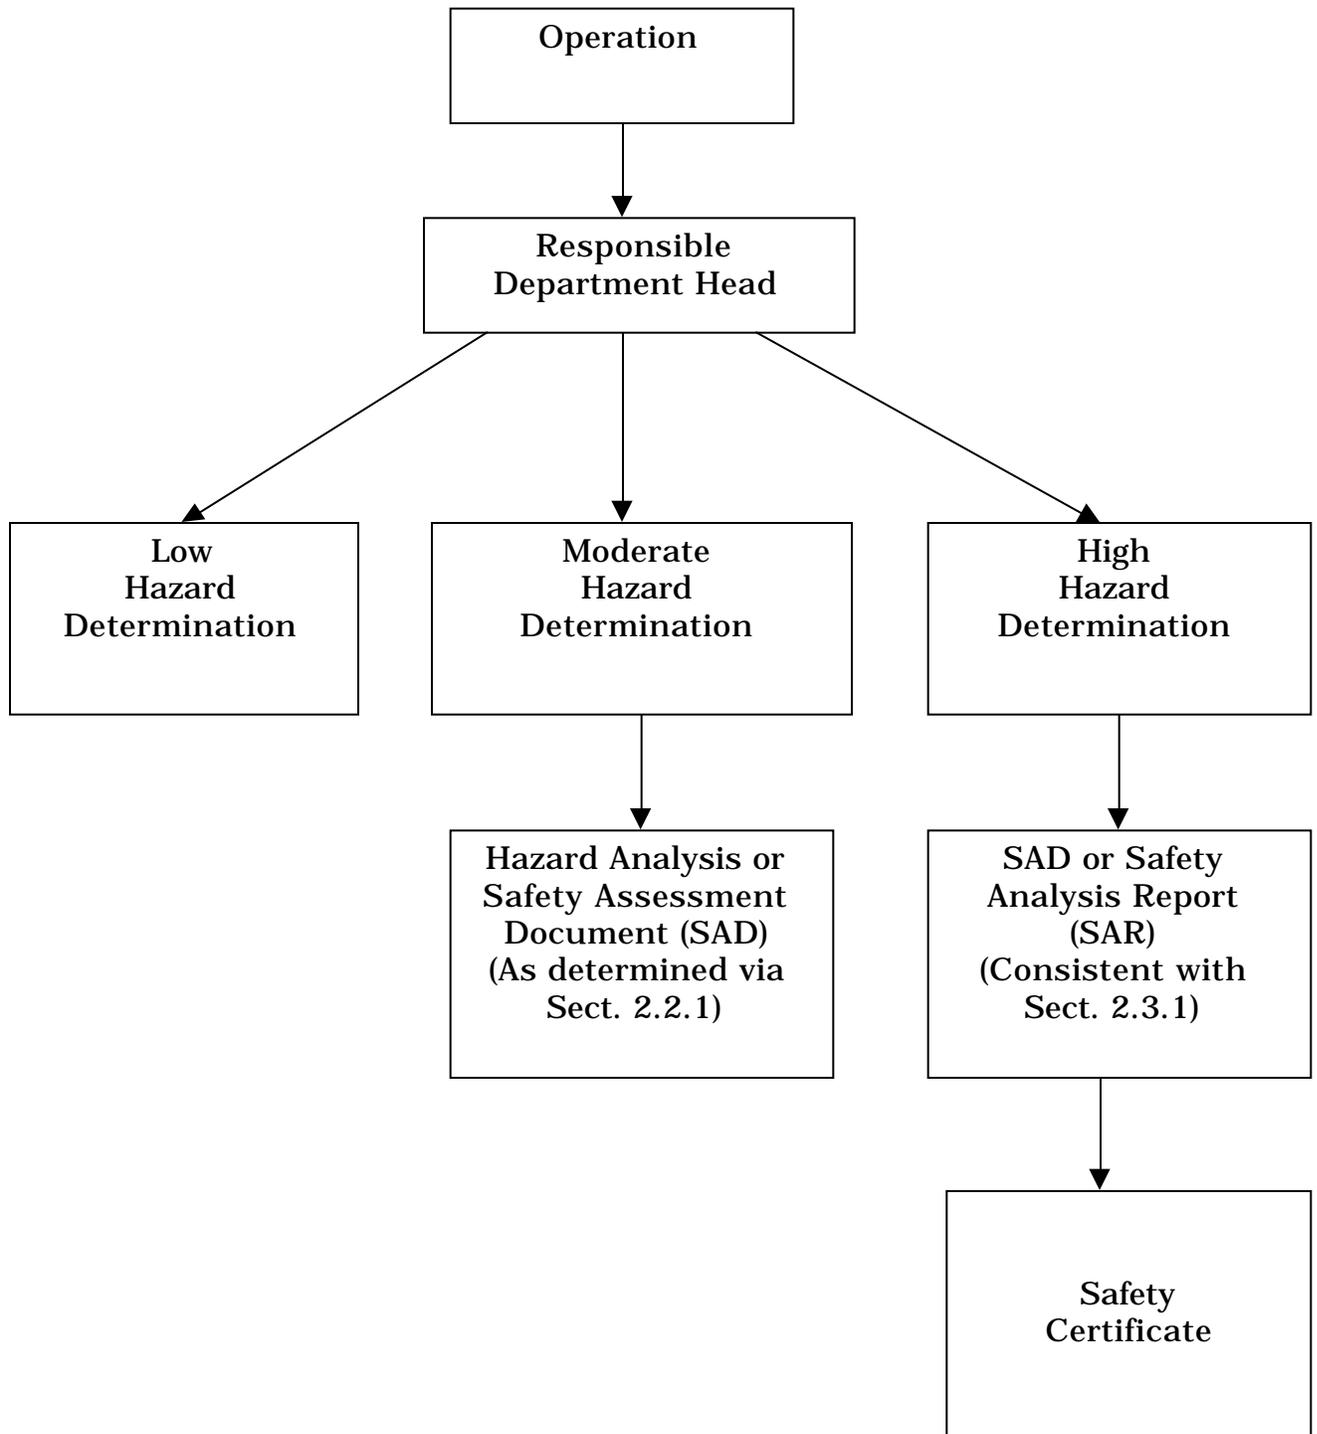

APPENDIX-2

SUGGESTED HAZARD ANALYSIS ELEMENTS

1. **Energy and Hazardous Material Analysis** - the process of identifying the types of energy, (kinetic, potential, electrical, radiation, etc.) or hazardous material, their sources and potential target(s) should an unwanted transfer of energy or hazardous material occur.
2. **Barrier Analysis** - the process of identifying the types and location of barriers present to control the source of energy or hazardous material, e.g., on the source, on the target, between the two, or separation of source and target by time and space.
3. **Protective Devices Analysis** – the process of determining the adequacy of protective devices, e.g., personal equipment, interlocks, etc.
4. **Failure Mode and Effects Analysis (FMEA)** - a FMEA is a detailed analysis of the failure modes in and the effects of those failures on components, subsystems, systems, etc., ultimately to determine the effects on the level of safety present in the system.
5. **Event Tree Analysis (ETA)** - an ETA is a logic block diagram for systematically determining, through event identification, the effects on the safety of the project and systems.
6. **Fault Tree Analysis (FTA)** - an FTA is a logic block diagram for systematically determining, through fault identification, the probability of failures in components and systems and the safety effects.
7. **Component Hazard Analysis** - an analysis and study to determine the effects of failures on safety at the component level.
8. **Subsystem Hazard Analysis** - a detailed study of a particular subsystem (a system that together with other systems, make up a larger, more complex system) to determine the effects on safety should that subsystem fail or malfunction.
9. **System Hazard Analysis** - a detailed study of an entire system, or project, to detect the effects of failures on safety of the overall system or any of its subsystems.
10. **Support of Operations Hazard Analysis** - a projected analysis to identify hazards associated with the operating and support functions of a system.
11. **Inspection and Maintenance Hazard Analysis** - the process of identifying hazards resulting from maintenance actions and to determine the adequacy of the inspection requirements.
12. **Sneak Circuit Analysis** - a study of electrical or electronic circuitry and their components to assure that they are completely isolated from other circuits and cannot activate unwanted states in associated circuits and/or other components.
13. **Human Factors Analysis** - an analysis of that part of the machine that interfaces with people to determine if the machine is suitably/safely designed for the people who will operate it.